


# ROCK AUGERS




pengoattachments.com | 800.599.0211


BOTTOM VIEW

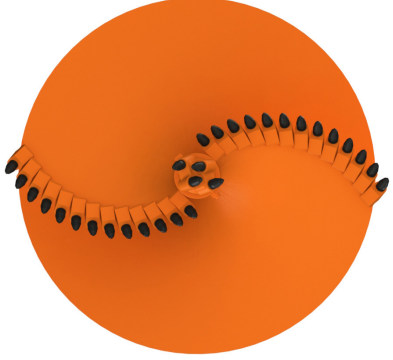

DOUBLE CUT  
DOUBLE CARRY

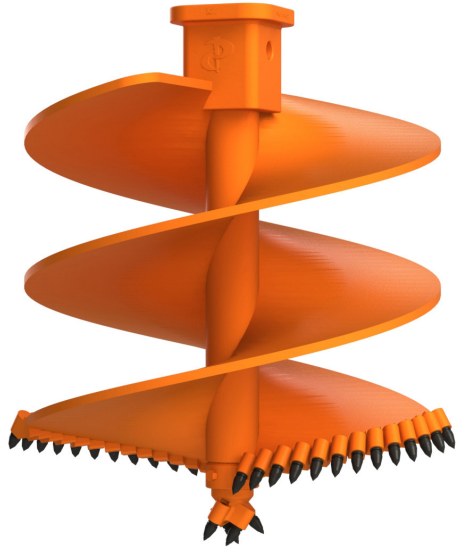

DOUBLE CUT  
SINGLE CARRY

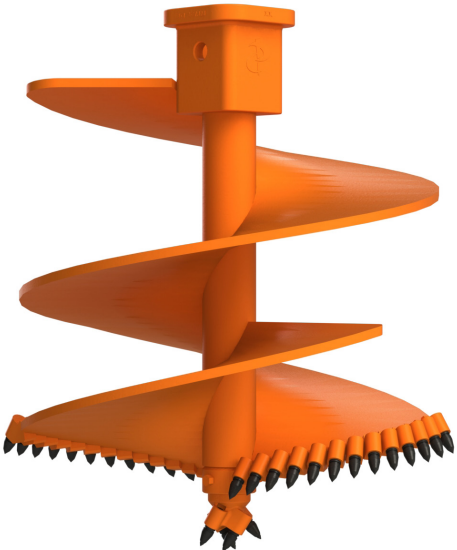


The Standard Rock Augers are built with the following components:  
C31-HD Pilot Bit, Strata® SR-100 and P-30 Holders.

## REORDER PARTS:



**C31-HD 2.5" Stem**  
135913  
2.5 Pin/Washer  
30 lbs.




**2.5 Adapter**  
151598  
6" OD  
4.3 lbs.  
use with C31HD



**SR-100 Tooth**  
850201  
38.5 lbs.  
bucket qty. 35



**S-31HD Tooth**  
850210  
38.5 lbs.  
bucket qty. 35



**S-31 Tooth**  
850028  
37 lbs.  
bucket qty. 35



Standard Overall Length: no less than 48"  
Standard Flight Thickness: 1" or 1 1/2"  
OD 14" - 24": 4" x 1" Center Shaft  
OD 30" - 60": 6" x 1" Center Shaft  
OD 66" - 96": 8" x 1" Center Shaft  
Standard Diameters Available:  
14", 16", 18", 24", 30", 36", 42", 48", 54",  
60", 66", 72", 84", and 96"

The above tooth part numbers are for buckets not each tooth (unless noted). When ordering buckets you may use these numbers. If applicable, pallet numbers are listed on page 12.

Pengo makes every effort to provide you with a solid, quality tool. Our standard foundation rock augers feature an single row, S-pattern cutting edge that provides peak performance in hard, fracturable rock drilling.

These augers are built with a cast or fabricated hub and your choice of flight thickness. The pinnacle of the Pengo's rock auger is the Strata® teeth. The special drilling grade carbide make Strata® top in it's class when it comes to life-cycle and performance.



**P-30 Holder**  
850224  
31.2 lbs.  
bucket qty. 12

The above holder part numbers are for buckets not each tooth. When ordering buckets you may use these numbers.

### CARRIER GUIDE:



STANDARD AUGERS LISTED ABOVE - Special Center Shafts and Custom Orders Available.  
Custom orders cannot be canceled and are non-returnable.

Images not to scale.

PENGO FOUNDATION AUGERS