





SPIRAL ROCK AUGERS



pengoattachments.com | 800.599.0211

BOTTOM VIEW

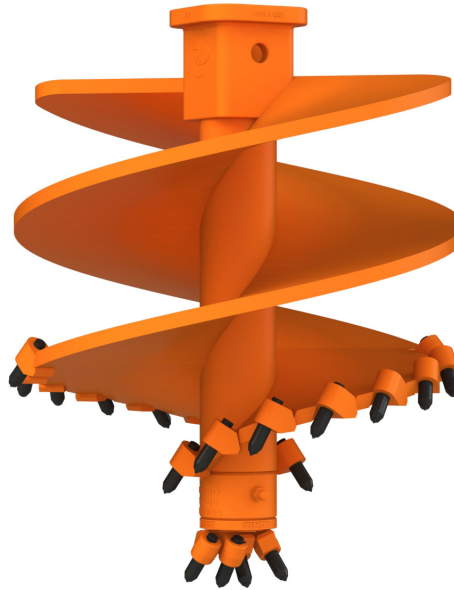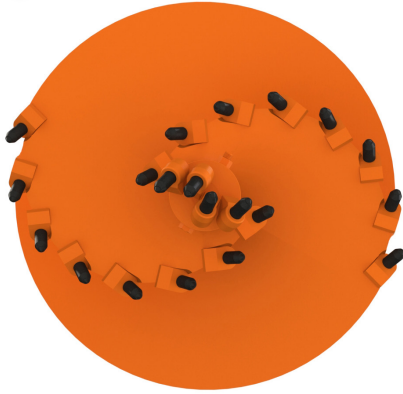


The Standard Spiral Rock Augers are built with the following components:
 B47 Pilot Bit, Strata® SR-104 and P-4 Holders.

Standard Overall Length: no less than 48"
 Standard Flight Thickness: 1 1/2"
 OD 16" - 96": 8" x 1" Center Shaft
 Standard Diameters Available:
 16", 18", 24", 30", 36", 42", 48", 54", 60", 66", 72", 84", and 96"


When selecting a tool for quick ground engagement, choose the Pengo Spiral Rock Auger. Designed for use on smaller foundation rigs, the spiral rock augers standard Strata® SR-104 Drilling grade teeth power through any fracturable rock conditions.

The heavy-duty P-4 holder design eliminates the need to fill large gaps when welding. With no excessive welding heat treat properties are kept in tact.

REORDER PARTS:



C4-1HF Pilot 2.5" Stem
 135971
 30 lbs.




2.5 Adapter
 151598
 4.3 lbs.
 use with C4-1 Pilot




SR-104 Tooth
 850207
 30.36 lbs.
 bucket qty. 12



S4-1 Tooth
 850211
 39 lbs.
 bucket qty. 15



B-47 Pilot 4" Stem
 135965
 72 lbs.




4.0 Adapter
 135904
 8" OD
 4.3 lbs.
 use with B-47 Pilot



SR-122 Tooth
 850209
 31.2 lbs.
 bucket qty. 12



S-22 Tooth
 850039
 2.6 lbs.
 bucket qty. 12
 (no bucket no.)



P-4 Holder
 850225
 29.2 lbs.
 bucket qty. 8

The above tooth and holder part numbers are for buckets not each tooth (unless noted). When ordering buckets you may use these numbers. If applicable, pallet numbers are listed on page 12.

PENGO FOUNDATION AUGERS

CARRIER GUIDE:



STANDARD AUGERS LISTED ABOVE - Special Center Shafts and Custom Orders Available.
 Custom orders cannot be canceled and are non-returnable.

Images not to scale.