

TRIMAX[®] AUGER





42", 48" and 60" OAL

SINGLE vs. DOUBLE:

The TriMax[®] auger is available with either single or double flight. Single flight is great for clay while double flighted augers give extra capacity and compacts loose soil on the flights.



Double Flight Auger ↓

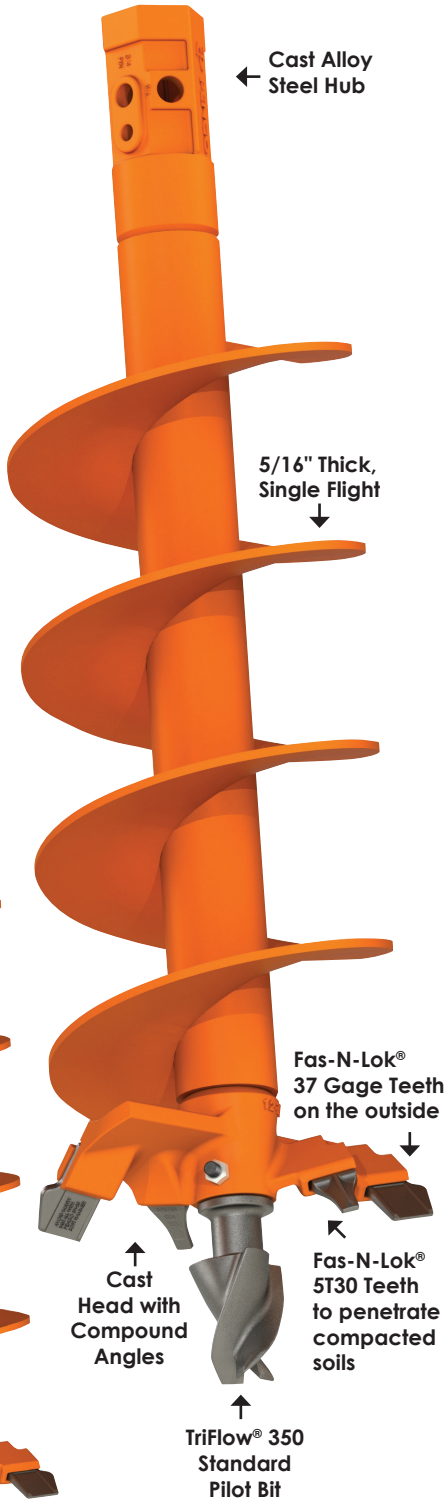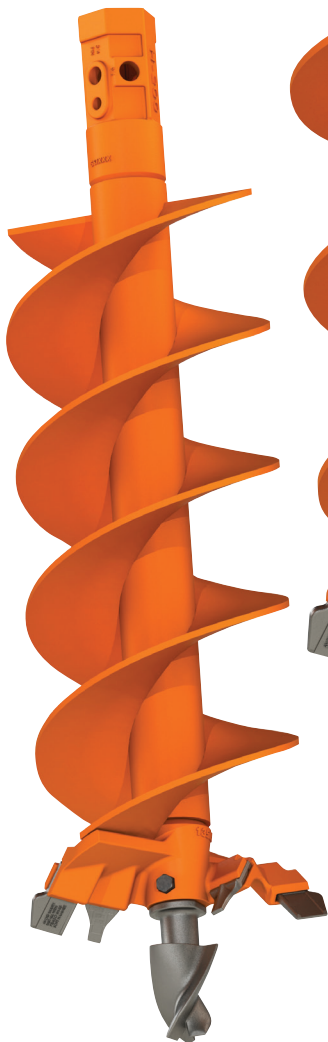

TRIMAX[®]

CONNECTIONS

- ROUND 2" 2 9/16"
- HEX 2"

AUGER DIAMETERS

- 6" 8" 9" 10" 12" 14" 16" 18"
- 20" 24" 30" 36" 42" 48"

CUT DIAMETER

Cut diameter is 1 1/2" larger than auger diameter.

DRILLING SOIL CONDITIONS:

| RECOMMENDED | | HIGHLY RECOMMENDED | | | NOT RECOMMENDED | |
|-------------|------|--------------------|------|--------|------------------|----------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| dirt | sand | silt | clay | gravel | fracturable rock | non-fracturable rock |



Pengo's TriMax[®] auger is designed to handle your most challenging applications across a variety of drilling conditions. Available in both single and double flight configurations, the TriMax[®] features our TriFlow[®] Pilot, which provides unmatched stability and wear characteristics. Combined with our Fas-N-Lok[®] teeth and cast head with compound angles; dirt, sand, silt or gravel are no match for the TriMax[®].