

# INSTRUCTIONS


## HOLLOW EXTENSION ASSEMBLY

**DUAL  
USE!**



**AS KELLY BAR  
DURING AUGER DRILLING**


**WITH AUGER ASSEMBLY**

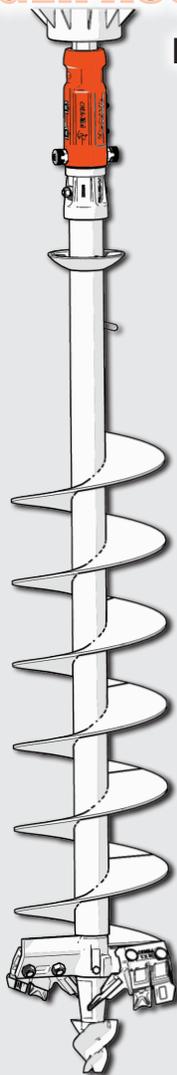

**PAGE 2**


**AS INSTALL TOOL  
DURING ANCHOR INSTALLATION**

**WITH ANCHOR ASSEMBLY**

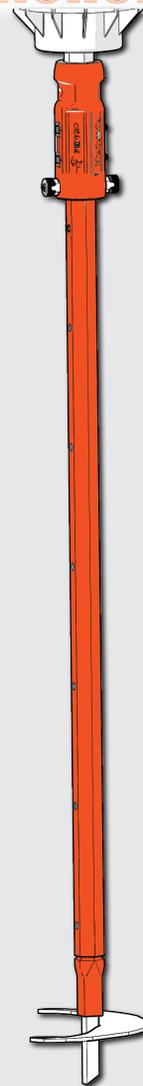


**PAGE 3**

# DRILLING APPLICATION

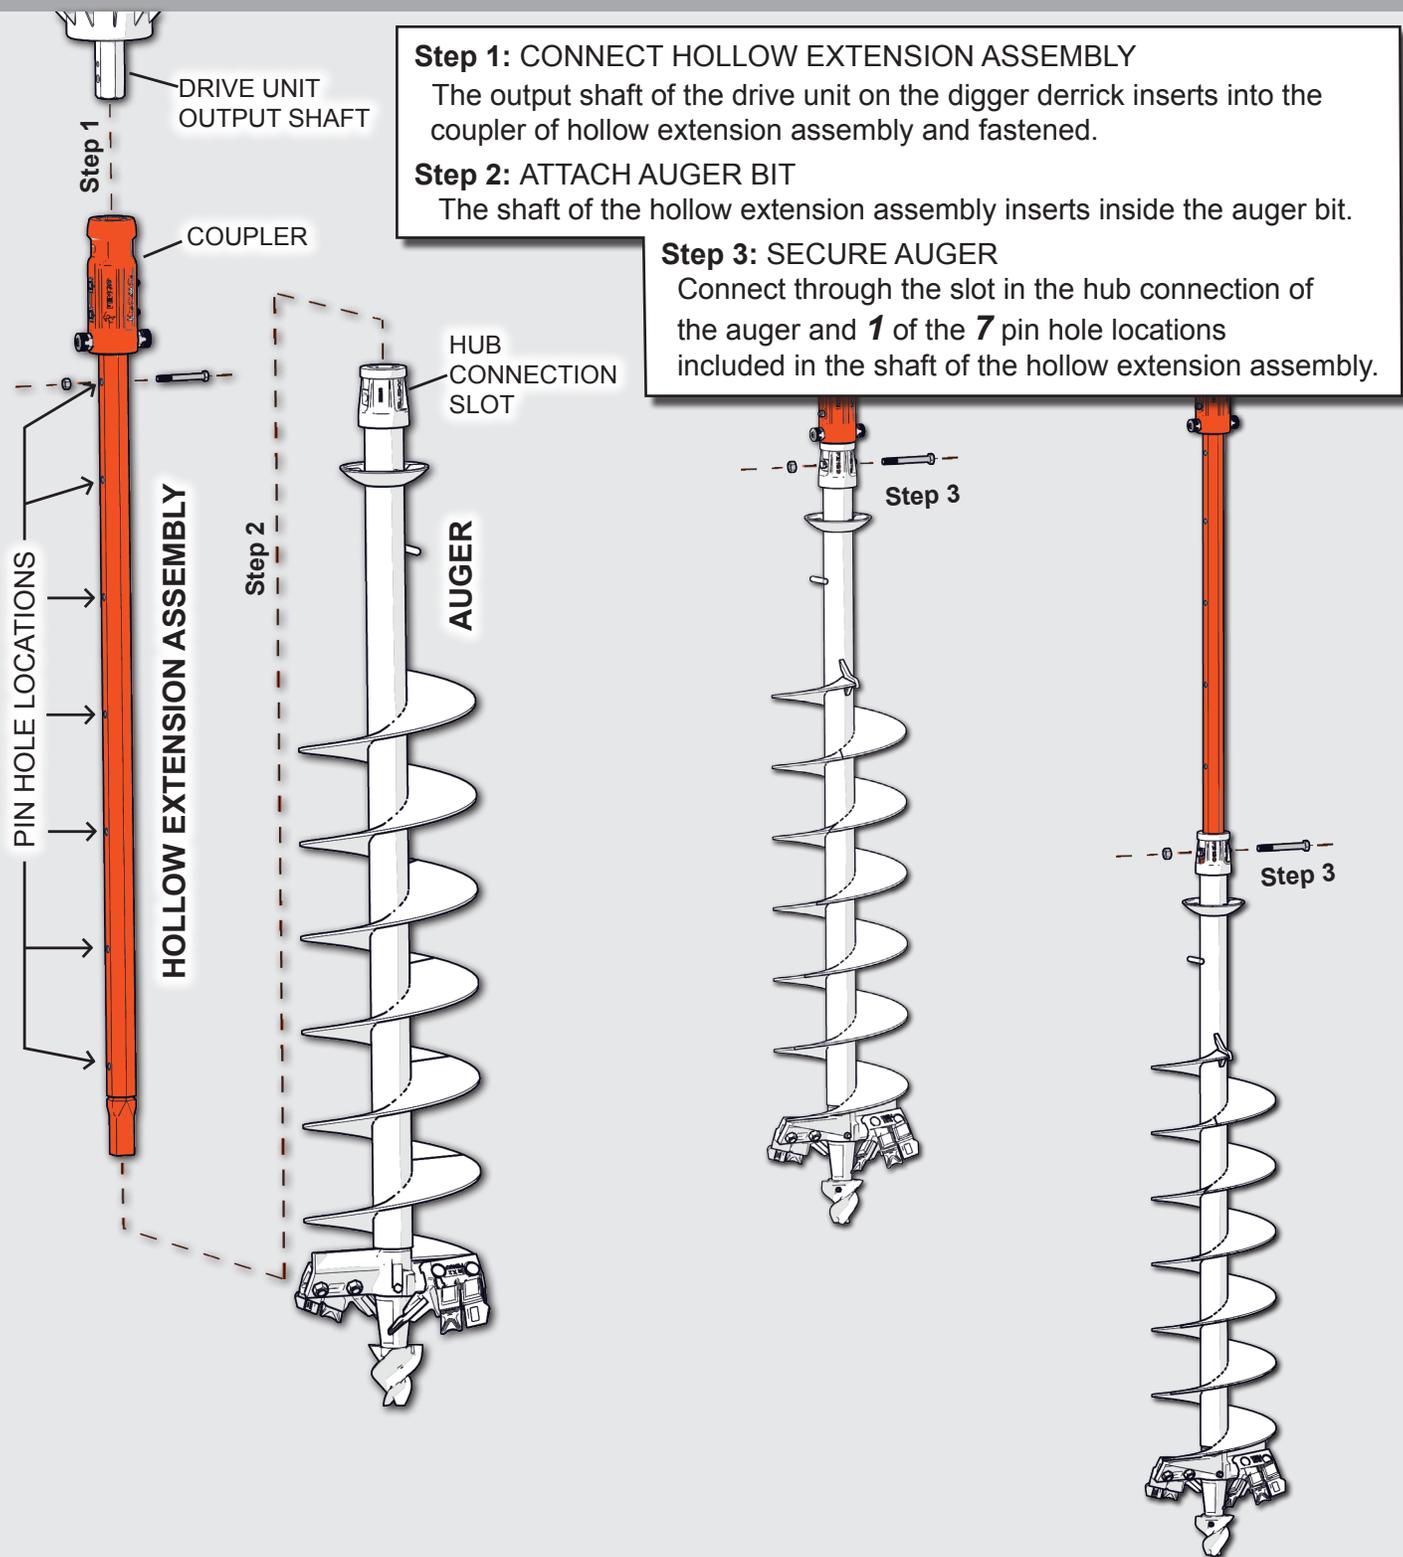

# ANCHOR INSTALLATION

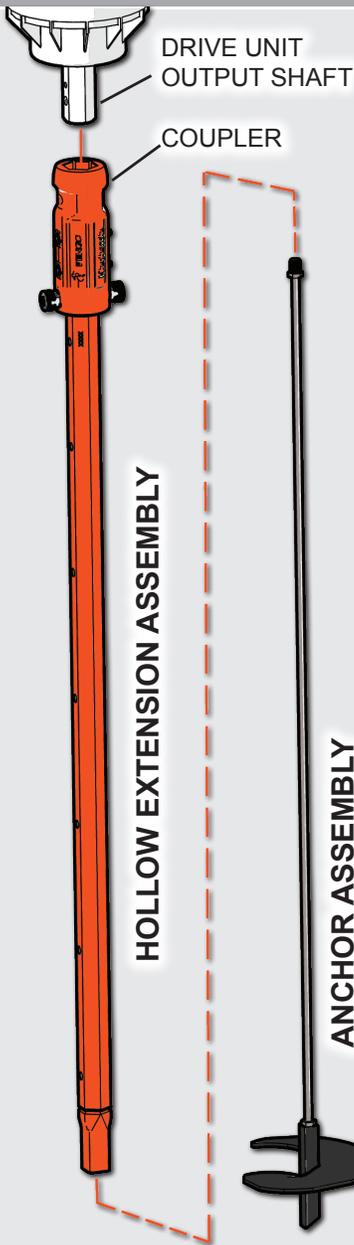

## Step 1: INSTALL ANCHOR

Insert anchor end thru the bottom of the hollow shaft until square of anchor fits inside of square end of shaft (FIG 1). A strong push of the anchor the last few inches will force the retainer pins open, allowing the rod end past the spring-loaded pins, locking the anchor in place (FIG 2).

## Step 2: SCREW ANCHOR AND HOLLOW EXTENSION ASSEMBLY INTO GROUND.

## Step 3: RELEASE ANCHOR

Pull the knobs of the retainer pins out ① and turn 90 degrees ② to lock pins in the open position (FIG 3). Pull the hollow extension assembly out of the ground leaving the anchor assembly in place.

*Turn the pin knobs back to their original locking position before installing another anchor.*

